


Commissioning Manual

- 1 Connect Zerova charger to Noodoe OCPP URL (<wss://ocpp.noodoe.com>) before EV OS Commissioning
- 2 Grey out the QR code on the screen before activating the station.



- 3 Attach the Station Label Sticker(L) as Shown Below

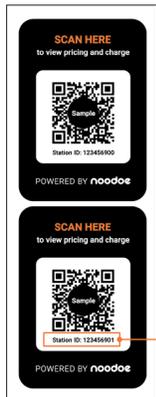

Station ID: 123456900
 Station ID number Connector number
 Left: 00; Right: 01


- 4 Noodoe EV OS Commissioning

Step 1

Scan either QR code to access the Installer Panel and initiate the charging station commissioning process.


Step 2

Input the Project Code provided by Noodoe or the charge point operator.

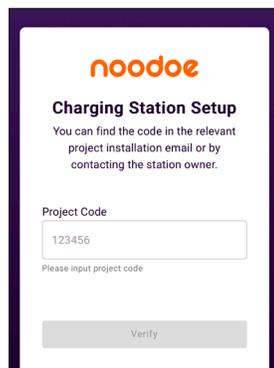

Step 3


Verify that the 7-digit auto-populated Station ID matches the first 7 digits on the Station ID stickers.



Step 4

Select the appropriate charger specifications:

- Output Details:
90kW, dual outputs
120kW, dual outputs
150kW, dual outputs
180kW, dual outputs
- Connector Type (1):
CCS1
- Connector Type (2):
CCS1

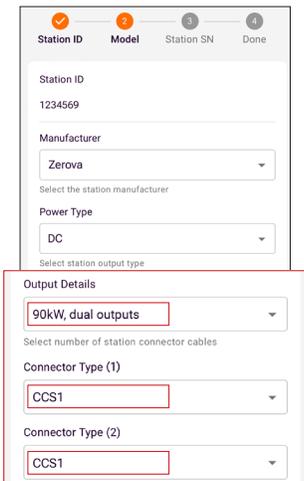

Step 5

To create the OCPP ID: Model Name + Version Identifier + S/N

1. Identify the charger's model name.
2. Locate the Version Identifier.
3. Find the charger's serial number (S/N).
4. Combine these elements for the OCPP ID:
Model Name + Version Identifier + S/N.



For example:

Model Name = "DSWA601U0UD1PH"


Version Identifier = "1P1"

S/N = "V2230A107A0"


OCPP ID: "DSWA601U0UD1PH1P1V2230A107A0"

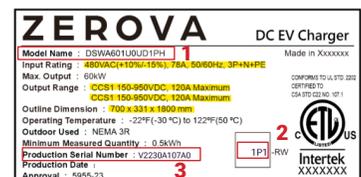

 Commissioning is now complete. The station can be found in Noodoe EV OS.



Center alignment



Alignment

