


Commissioning Manual

1 Connect Zerova charger to Noodoe OCPP URL (<wss://ocpp.noodoe.com>) before EV OS Commissioning

2 Update the link of QR Code on the charger to Noodoe QR Code Link (Scan the sticker and get the link address)

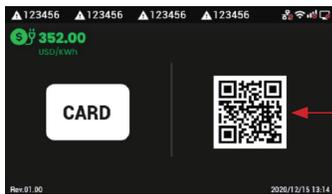

3 Attach the Station Label Sticker as Shown Below.



Station ID: 1234568


4 Noodoe EV OS Commissioning

Step 1

Scan either QR code to access the Installer Panel and initiate the charging station commissioning process.


Step 2

Input the Project Code provided by Noodoe or the charge point operator.

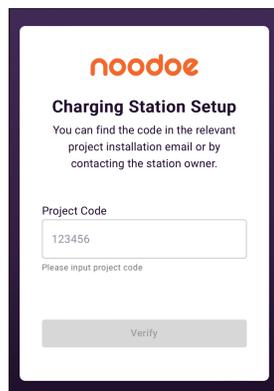

Step 3

Verify that the 7-digit auto-populated Station ID matches the 7 digits on the Station ID stickers.

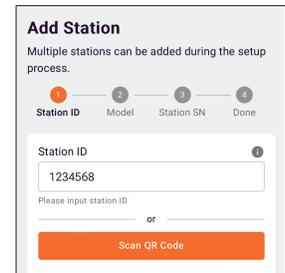

Step 4


Select the appropriate Zerova specifications:

AX48

- Output Details: **11kW, single output**
- Connector Type: **Type 1 (J-1772)**

AX80

- Output Details: **19kW, single output**
- Connector Type: **Type 1 (J-1772)**

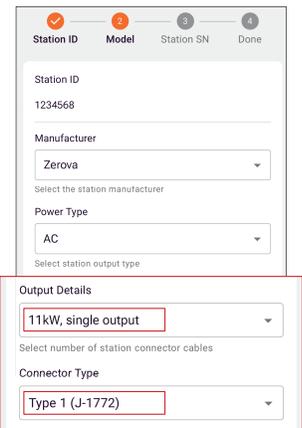

Step 5

To create the OCPP ID: **Model Name + Version Identifier + S/N**

1. Identify the charger's model name.
2. Locate the Version Identifier.
3. Find the charger's serial number (S/N).
4. Combine these elements for the OCPP ID: **Model Name + Version Identifier + S/N.**


For example:

Model Name = "AXLU111001D"


Version Identifier = "1P1"

S/N = "V2230A107A0"

OCPP ID: "AXLU111001D1P1V2230A107A0"

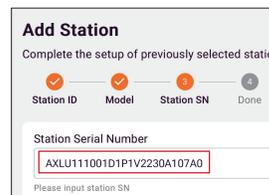

Commissioning is now complete. The station can be found in Noodoe EV OS.

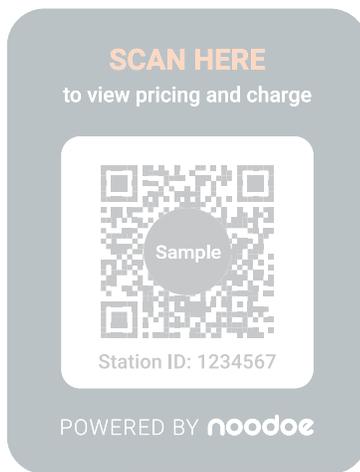

1.9 inch
(48.2 mm)

2.6 inch
(66 mm)