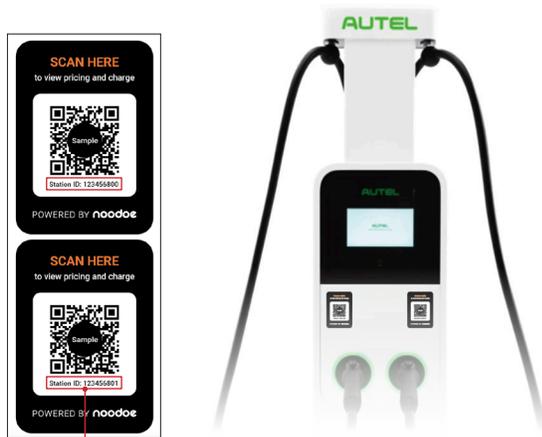# Commissioning Manual

noodoe

1 Connect Autel MaxiCharger AC Ultra to Noodoe OCPP URL (wss://ocpp.noodoe.com) Before EV OS Commissioning.

2 Attach the Station Label Sticker(M) as Shown Below

Station ID: 1234568 00

Station ID number
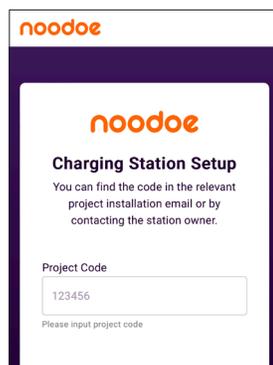
Connector number
Left: 00
Right: 01

3 Noodoe EV OS Commissioning

Step 1

Scan either QR code to access the Installer Panel and initiate the charging station commissioning process.
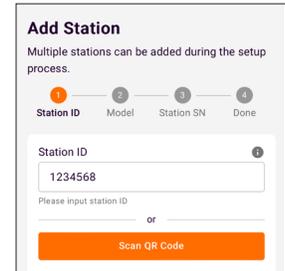
Step 2

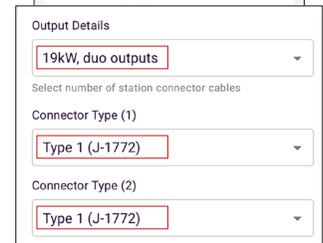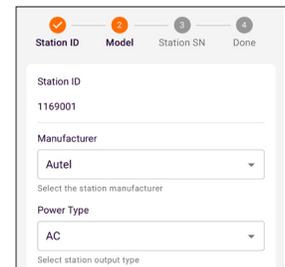Input the Project Code provided by Noodoe or the charge point operator.

Step 3

Verify that the 7-digit auto-populated Station ID matches the first **7 digits** on the Station ID stickers.

Add Station
Multiple stations can be added during the setup process.
1 Station ID — 2 Model — 3 Station SN — 4 Done
Station ID
1234568
Please input station ID
or
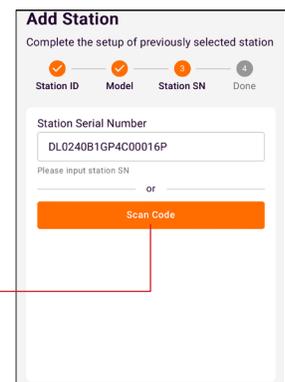Scan QR Code

Step 4

Select the appropriate Autel MaxiCharger AC Ultra model specifications.

- Output Details:
  19kW, duo outputs
- Connector Type (1):
  Type 1 (J-1772)
- Connector Type (2):
  Type 1 (J-1772)

Station ID — Model — Station SN — Done
Station ID
1169001
Manufacturer
Autel
Select the station manufacturer
Power Type
AC
Select station output type
Output Details
19kW, duo outputs
Select number of station connector cables
Connector Type (1)
Type 1 (J-1772)
Connector Type (2)
Type 1 (J-1772)

Step 5

Enter the station Serial Number(SN) manually or by scaning the QR Code.

Add Station
Complete the setup of previously selected station
Station ID — Model — Station SN — Done
Station Serial Number
DL0240B1GP4C00016P
Please input station SN
or
Scan Code

S/N: DL0240B1GP4C00016P

Charging Station Setup
You can find the code in the relevant project installation email or by contacting the station owner.
Project Code
123456
Please input project code

✅ Commissioning is now complete. The station can be found in Noodoe EV OS.