noodoe

Tellus Power Green DC Fast Charger (30kW)

Commissioning Manual

---

1 **Connect Tellus Power Green DC Fast Charger to Noodoe OCPP URL (wss:// ocpp.noodoe.com) Before EV OS Commissioning.**

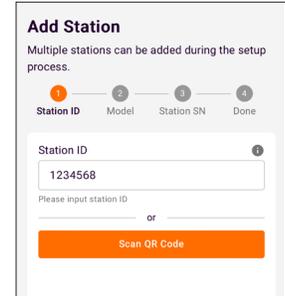**2** **Attach the Station Label Sticker as Shown Below**
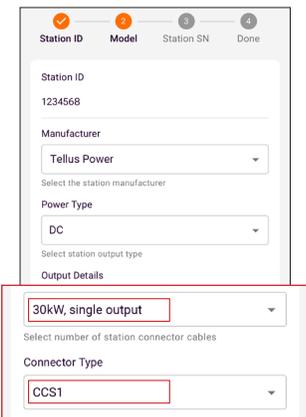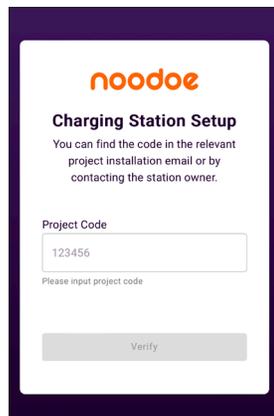

Station ID: 1234568

3 **Noodoe EV OS Commissioning**

Scan **either** QR code to access the Installer Panel and initiate the charging station commissioning process.
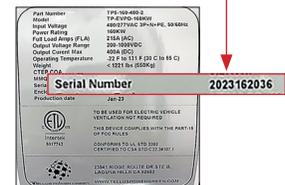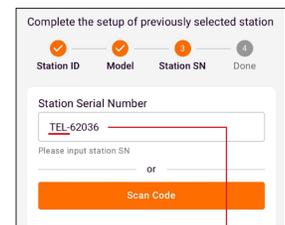
Input the Project Code provided by Noodoe or the charge point operator.

noodoe

Charging Station Setup

You can find the code in the relevant project installation email or by contacting the station owner.

Project Code

123456

Please input project code

Verify

Verify that the 7-digit auto-populated Station ID matches the **7 digits** on the Station ID stickers.

Add Station

Multiple stations can be added during the setup process.

① Station ID — ② Model — ③ Station SN — ④ Done

Station ID

1234568

Please input station ID

or

Scan QR Code

Select the appropriate Tellus Power Green DC Fast Charger model specifications.

Station ID ✓ — ② Model — ③ Station SN — ④ Done

Station ID

1234568

Manufacturer

Tellus Power ▼

Select the station manufacturer

Power Type

DC ▼

Select station output type

Output Details

30kW, single output ▼

Select number of station connector cables

Connector Type

CCS1 ▼

Find the Serial Number on the Tellus Power Green DC Fast Charger sticker. Enter the Station SN manually using the following format: **TEL-62036** (last 5 digits).

* "**TEL-**" must be capital letter.

Complete the setup of previously selected station

Station ID ✓ — Model ✓ — ③ Station SN — ④ Done

Station Serial Number

TEL-62036

Please input station SN

or

Scan Code

Serial Number   2023162036

✅ Commissioning is now complete. The station can be found in Noodoe EV OS.