

Tellus Power Green DC Fast Charger (60/120/160/180/300/360kW)

Commissioning Manual

1 Connect Tellus Power Green DC Fast Charger to Noodoe OCPP URL (<wss://ocpp.noodoe.com>) Before EV OS Commissioning.

2 Attach the Station Label Sticker as Shown Below




3 Noodoe EV OS Commissioning

Step 1

Scan either QR code to access the Installer Panel and initiate the charging station commissioning process.


Step 2

Input the Project Code provided by Noodoe or the charge point operator.

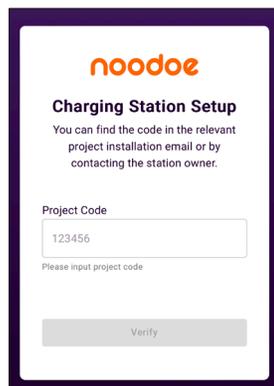

Step 3


Verify that the 7-digit auto-populated Station ID matches the first 7 digits on the Station ID stickers.




Step 4

Select the appropriate Tellus Power Green DC Fast Charger model specifications.

* Chose corresponding specifications in the drop-down menu of "Output Detail".

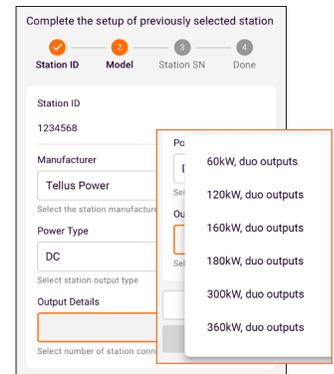



* The connector type (CCS1 / CHAdeMO / NACS) will be provided by Tellus during commissioning process.



Step 5

Find the Serial Number on the Tellus Power Green DC Fast Charger sticker. Enter the Station SN manually using the following format: TEL-62036 (last 5 digits).

* "TEL-" must be capital letter.



 Commissioning is now complete. The station can be found in Noodoe EV OS.